

Cut Filters For UV & IR

CutFilter for UV & IR

UV & IR cut filters block troublesome UV/ VIS or NIR light. They are robust, cost-effective and insensitive to angle of incidence. Additional to their filter function they are also a protective window in imaging systems.

Cut filters are available unmounted in sizes from 10 mm to 74 mm diameter and mounted with common thread sizes M 25.5 to M 67. We offer several AR coating options, depending on filter type.

Call us to discuss your OEM and custom requirements.



Key Features

- Unmounted in sizes 10 mm to 74 mm diameter.
- Mounted with common thread sizes M 25.5 to M 67 available
- AR coated and uncoated versions available
- Pass Wavelength Range:
 - UV cut: > 365 nm +/- 10 nm
 - UV-IR cut: 390 +/-15 nm to 690 +/- 20 nm
 - IR cut: T= 50% @ 750 nm

Applications

- Scientific Research
- QA
- Landscaping
- Protective Windows
- Solar

Technical Specifications

Filter type	UV cut IF 010, UV/IR cut UI 515, UV/IR cut IF 486, IR cut Filter IF 489
Surface ¹	5/2 × 0.16
Wave front distortion ¹	13/1 (0.25)
Parallelism	1 arc minute
Diameter tolerance	+0 - 0.3 mm
Thickness	2.0 ± 0.2 mm

¹ Specification according to ISO 10110

Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-351
 Fax +49 671 601-81-351
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Asia Pacific Ltd.
 20/F Central Tower, 28 Queen's Road
 Central, Hong Kong
 China
 Phone +852 8302 0301
 Fax +852 8302 4722
www.schneider-asiapacific.com
info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
www.schneideroptics.com
oem@schneideroptics.com

UV Cut Filter (IF 010)

IF 010 UV cut Filter

UV cut filters block troublesome UV light. They are robust, cost-effective and insensitive to angle of incidence. Additional to their filter function they are also a protective window in imaging systems.

UV cut filters are available unmounted in sizes from 10 mm to 74 mm diameter and as mounted filters with common thread sizes M 25.5 to M 67.

Available with AR coating options: broadband coating (E) or multi resistance coating (MRC).

Call us to discuss your OEM and custom requirements.



Key Features

- Unmounted 10 mm to 74 mm diameter.
- Mounted with common thread sizes M 25.5 to M 67 available
- AR coating options: broadband (E) or multi resistance (MRC)
- Pass Wavelength Range: UV cut: > 365 nm +/- 10 nm

Applications


- QA
- Landscaping
- Protective Windows
- Scientific Research

Technical Specifications

Filter type	IF 010		
Cut-on wavelength	> 365 nm	Wave front distortion ¹	10 – 30 mm:13/1 (0.2) 31 – 50 mm:13/1 (0.25) 51 – 74 mm:13/1 (0.35)
Wavelength tolerance	± 10 nm	Parallelism	1 arc minute
Peak transmittance	> 90 %	Diameter	10 - 74 mm
Blocking	< 1 %	Diameter tolerance	+0 - 0.3 mm
Surface ¹	5/2 × 0.16	Thickness	2.0 ± 0.2 mm

¹ Specification according to ISO 10110

UV Cut Filter 010

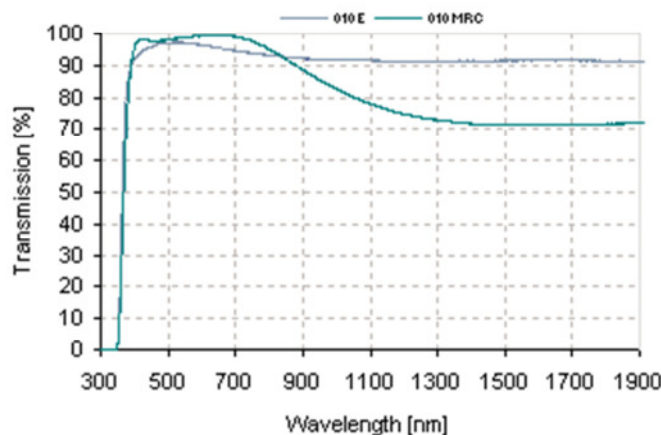

Order Instructions:																										
Mounted filter:	IF																									
Unmounted filter glass:	IFG																									
Type:	010 UV Cut 486 UV-IR Cut UI 515 UV-IR Cut																									
Coating:	489 IR Cut E (broadband coating) - not for IF486																									
Mount:	MRC (multi resistant coating) SH (standard M- thread mounts) SN-1 (only for 30.5mm)																									
Size:	CMT (C-mount) Thread of mount for mounted filters (IF) or Diameter in mm for unmounted glass (IFG)																									
Examples:	<table border="0"> <thead> <tr> <th>IFx</th> <th>type</th> <th>coating</th> <th>mount</th> <th>size</th> </tr> </thead> <tbody> <tr> <td>IF</td> <td>489</td> <td>MRC</td> <td>SN1</td> <td>30.5</td> </tr> <tr> <td>Mounted filter,</td> <td>IR-cut,</td> <td>MRC coated,</td> <td>thread size</td> <td>M30.5</td> </tr> <tr> <td>IFG</td> <td>010</td> <td>E</td> <td></td> <td>50.0</td> </tr> <tr> <td>Unmounted filter, UV-cut</td> <td></td> <td>E coated,</td> <td></td> <td>diameter 50.0 mm</td> </tr> </tbody> </table>	IFx	type	coating	mount	size	IF	489	MRC	SN1	30.5	Mounted filter,	IR-cut,	MRC coated,	thread size	M30.5	IFG	010	E		50.0	Unmounted filter, UV-cut		E coated,		diameter 50.0 mm
IFx	type	coating	mount	size																						
IF	489	MRC	SN1	30.5																						
Mounted filter,	IR-cut,	MRC coated,	thread size	M30.5																						
IFG	010	E		50.0																						
Unmounted filter, UV-cut		E coated,		diameter 50.0 mm																						